Bourdon Tube Pressure Gauge Type 111.11PM Panel Mount Gauge Standard Series

WIKA Datasheet 111.11PM

Applications

- Compressed gas regulation
- HVAC and recovery systems
- Suitable for all media that will not obstruct the pressure system or attack copper alloy parts

Special features

- Durable black ABS case
- Twist-lock window
- Reliable and economical

Standard Features

Design

ASME B40.100

Sizes

21/2" (68 mm)

Accuracy class

± 3/2/3% of span (ASME B40.100 Grade B)

Ranges

Vacuum / Compound to 200 psi Pressure from 15 psi to 6,000 psi or other equivalent units of pressure or vacuum

Working pressure

Steady: 3/4 of full scale value Fluctuating: 2/3 of full scale value Short time: full scale value

Operating temperature

Ambient: -40°F to 140°F (-40°C to 60°C) Media: 140°F (+60°C) maximum

Temperature error

Additional error when temperature changes from reference temperature of $68^{\circ}F$ ($20^{\circ}C$) $\pm 0.4\%$ for every $18^{\circ}F$ ($10^{\circ}C$) rising or falling. Percentage of span.

Pressure connection

Material: copper-alloy

1/8" or 1/4" NPT center back mount (CBM)



Bourdon Tube Pressure Gauge Type 111.11PM

Bourdon tube

Material: copper alloy 15 psi to 600 psi: C-type 800 psi to 6,000 psi: helical

Movement

Copper alloy

Dial

White aluminum with stop pin and black lettering. Zero-adjustment screw on dial

Pointer

Black aluminum

Case

Black ABS

Window

Twist-lock clear polycarbonate

U-clamp bracket


Zinc-plated steel with two threaded screws



Optional Extras

- Brass restrictor
- Custom dial layout
- Special threaded connection
- Other pressure scales available:

bar, kPa, MPa, kg/cm² and dual scales

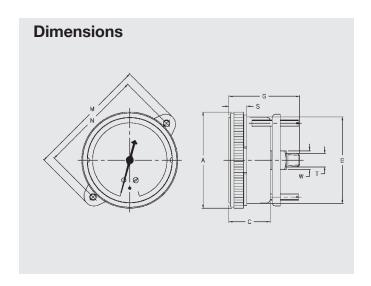

Size											
		Α	В	С	G	M	N	S	T	W	Weight
2.5"	mm	72.4	65	31	56	91	78	13.5		14	
	in	2.85	2.56	1.22	2.20	3.58	3.07	0.53	1/4"	0.55	0.30 lb

Recommended panel cutout is dimension D + 1 mm

Page 2 of 2

Ordering information

Pressure gauge model / Nominal size / Scale range / Size of connection / Optional extras required Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.

WIKA Datasheet 111.11PM · 03/2005



WIKA Instrument Corporation

1000 Wiegand Boulevard Lawrenceville, GA 30045 Tel (770) 513-8200 Toll-free 1-888-WIKA-USA Fax (770) 338-5118 E-Mail info@wika.com www.wika.com