Bourdon Tube Pressure Gauge Type 111.25CT Contractor Gauge Standard Series

WIKA Datasheet 111.25CT

Applications

- HVAC
- Suitable for all media that will not obstruct the pressure system or attack copper alloy parts

Special features

- Stainless steel case
- ± 1% accuracy
- Reliable and economical

30 50 60 70 80 90 July psi

Standard Features

Design

ASME B40.100

Sizes

41/2" (124 mm)

Accuracy class

± 1% of span (ASME B40.100 Grade 1A)

Ranges

Vacuum / Compound to 200 psi Pressure from 15 psi to 600 psi or other equivalent units of pressure or vacuum

Working pressure

Steady: 3/4 of full scale value Fluctuating: 2/3 of full scale value Short time: full scale value

Operating temperature

Ambient: -40°F to 140°F (-40°C to 60°C) Media: 140°F (+60°C) maximum

Temperature error

Additional error when temperature changes from reference temperature of 68°F (20°C) $\pm 0.4\%$ for every 18°F (10°C) rising or falling. Percentage of span.

Pressure connection

Material: Copper alloy

1/8" or 1/4" NPT lower mount (LM)

Bourdon Tube Pressure Gauge Type 111.25CT

Bourdon tube

Material: copper alloy C-type

Movement

Copper alloy

Dial

White aluminum with stop pin and black lettering

Pointer

Black aluminum, adjustable

Case

Stainless steel, matte finish

Window


Snap-in acrylic



Optional Extras

- Stainless steel rear flange
- Brass restrictor
- Nickel-plated connection
- Special threaded connection
- Custom dial layout
- Other pressure scales available:

bar, kPa, MPa, kg/cm² and dual scales

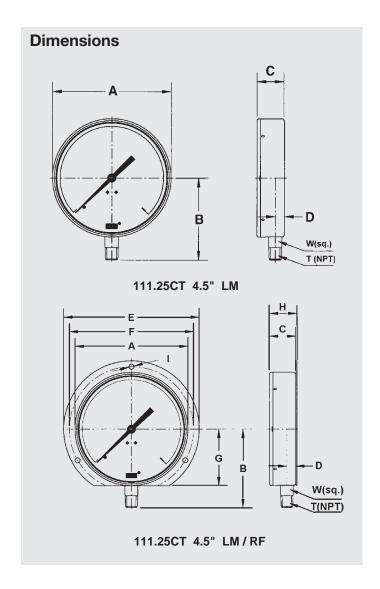

Size													
		Α	В	С	D	E	F	G	Н		Т	W	Weight
4.5"	mm	124	86	29.2	9.8	149	137	62	30.5	5.6		14	
	in	4.88	3.38	1.15	0.39	5.87	5.37	2.44	1.20	0.22	1/4"	0.55	0.80 lb.

Page 2 of 2

Ordering information

Pressure gauge model / Nominal size / Scale range / Size of connection / Optional extras required Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.

WIKA Datasheet 111.25CT · 03/2005



WIKA Instrument Corporation

1000 Wiegand Boulevard Lawrenceville, GA 30045 Tel (770) 513-8200 Toll-free 1-888-WIKA-USA Fax (770) 338-5118 E-Mail info@wika.com www.wika.com